

品番 : RAD736N

光源 : Lamp_JDR_2700K_狭角 (420Lm x1)
 (RAD736N)2700K

光源光束 : 420 Lm



器具効率 : 1.00

定格光束 : 420 Lm
 (器具光束)

保守率 良い 0.78
 普通 0.76
 劣る 0.72

[cd/光源光束1000lm]

	0°
0°	11201.28
5°	5734.63
10°	2357.18
15°	927.2
20°	457.94
25°	241.12
30°	133.36
35°	83.5
40°	59.85
45°	46.7
50°	34.69
55°	25.69
60°	20.06
65°	16.03
70°	12.47
75°	9.32
80°	6.61
85°	3.41
90°	1.5

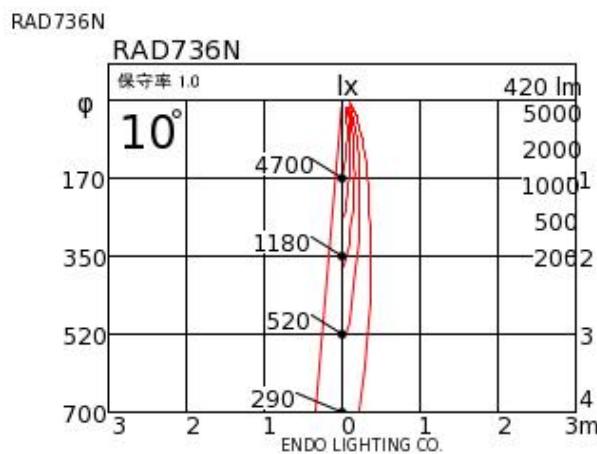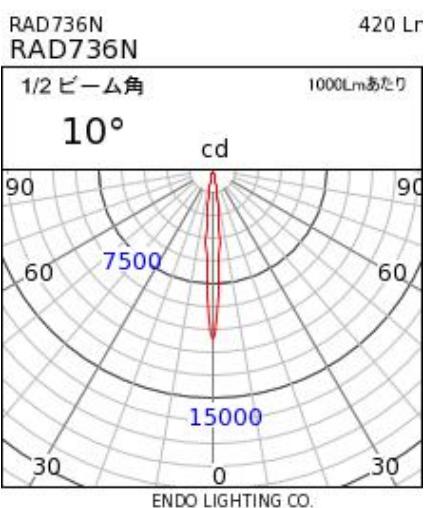

照明率表

天井	70%						50%						30%						0%	
	壁		50%		30%		10%		50%		30%		10%		50%		30%		10%	
壁	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
床	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	0%
0.6	0.85	0.81	0.80	0.78	0.77	0.75	0.84	0.81	0.79	0.78	0.76	0.75	0.83	0.80	0.79	0.77	0.76	0.75	0.74	
0.8	0.92	0.86	0.86	0.83	0.83	0.81	0.90	0.86	0.85	0.83	0.82	0.81	0.88	0.85	0.84	0.82	0.81	0.80	0.79	
1	0.96	0.90	0.91	0.87	0.87	0.84	0.94	0.89	0.89	0.86	0.86	0.84	0.91	0.88	0.88	0.85	0.85	0.84	0.82	
1.25	0.99	0.91	0.93	0.88	0.89	0.86	0.95	0.90	0.91	0.87	0.88	0.85	0.93	0.89	0.89	0.86	0.86	0.84	0.83	
1.5	1.00	0.92	0.95	0.89	0.90	0.86	0.96	0.90	0.92	0.88	0.88	0.85	0.93	0.89	0.90	0.87	0.87	0.85	0.83	
2	1.05	0.95	1.00	0.92	0.96	0.90	1.01	0.94	0.97	0.91	0.93	0.89	0.97	0.92	0.93	0.90	0.91	0.88	0.86	
2.5	1.08	0.97	1.04	0.95	1.00	0.93	1.03	0.96	1.00	0.93	0.97	0.92	0.99	0.94	0.96	0.92	0.94	0.91	0.88	
3	1.11	0.99	1.07	0.97	1.03	0.95	1.06	0.97	1.02	0.95	1.00	0.94	1.01	0.96	0.98	0.94	0.96	0.93	0.90	
4	1.17	1.03	1.14	1.02	1.12	1.01	1.11	1.02	1.09	1.00	1.07	1.00	1.05	1.00	1.04	0.99	1.02	0.98	0.96	
5	1.18	1.04	1.16	1.03	1.14	1.02	1.12	1.02	1.10	1.01	1.08	1.00	1.06	1.00	1.05	0.99	1.03	0.99	0.96	
10	1.24	1.07	1.23	1.07	1.22	1.07	1.16	1.05	1.16	1.05	1.15	1.05	1.10	1.03	1.09	1.03	1.09	1.03	1.01	

データ更新日 : 2024/08/02

品番 : RAD736M

光源 : Lamp_JDR_2700K_中角 (420Lm x1)
 (RAD736M)2700K

光源光束 : 420 Lm



器具効率 : 1.00

定格光束 : 420 Lm
 (器具光束)

保守率
 良い 0.78
 普通 0.76
 劣る 0.72

[cd/光源光束1000lm]

	0°
0°	4612.11
5°	4332.61
10°	2774.76
15°	1189.06
20°	609.81
25°	367.09
30°	192.84
35°	86.13
40°	38.2
45°	21.63
50°	14.85
55°	10.58
60°	7.84
65°	5.92
70°	4.6
75°	3.5
80°	2.44
85°	1.29
90°	0.32

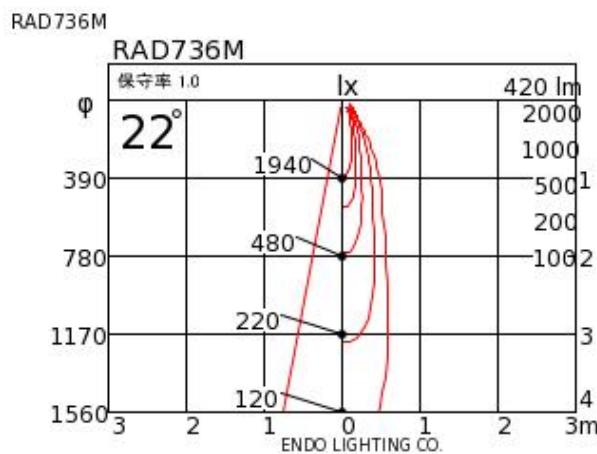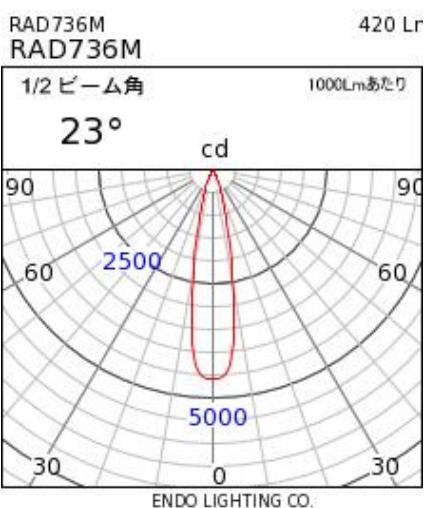

照明率表

天井	70%						50%						30%						0%	
	壁		50%		30%		10%		50%		30%		10%		50%		30%		10%	
壁	50%	30%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	0%	0%
床	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%
0.6	0.85	0.82	0.81	0.78	0.77	0.76	0.84	0.81	0.80	0.78	0.77	0.76	0.83	0.80	0.79	0.78	0.76	0.76	0.75	
0.8	0.92	0.87	0.87	0.84	0.84	0.82	0.90	0.86	0.86	0.84	0.83	0.82	0.89	0.86	0.85	0.83	0.82	0.81	0.80	
1	0.97	0.90	0.92	0.88	0.88	0.85	0.94	0.90	0.90	0.87	0.87	0.85	0.92	0.89	0.89	0.86	0.86	0.85	0.84	
1.25	0.99	0.92	0.94	0.89	0.90	0.87	0.96	0.91	0.92	0.88	0.89	0.86	0.94	0.90	0.90	0.88	0.87	0.86	0.84	
1.5	1.01	0.92	0.96	0.90	0.92	0.87	0.97	0.91	0.93	0.89	0.90	0.87	0.94	0.90	0.91	0.88	0.88	0.86	0.84	
2	1.06	0.96	1.01	0.93	0.97	0.91	1.01	0.94	0.97	0.92	0.94	0.90	0.97	0.93	0.94	0.91	0.92	0.89	0.87	
2.5	1.09	0.97	1.04	0.95	1.01	0.93	1.04	0.96	1.00	0.94	0.97	0.92	0.99	0.94	0.97	0.93	0.94	0.91	0.89	
3	1.11	0.99	1.07	0.97	1.04	0.95	1.06	0.97	1.03	0.96	1.00	0.94	1.01	0.96	0.99	0.94	0.96	0.93	0.91	
4	1.17	1.03	1.14	1.02	1.12	1.01	1.11	1.01	1.09	1.00	1.07	0.99	1.05	1.00	1.04	0.99	1.02	0.98	0.96	
5	1.18	1.03	1.15	1.02	1.13	1.01	1.11	1.02	1.10	1.01	1.08	1.00	1.06	1.00	1.04	0.99	1.03	0.99	0.96	
10	1.23	1.06	1.22	1.06	1.21	1.06	1.16	1.04	1.15	1.04	1.14	1.04	1.09	1.03	1.08	1.02	1.08	1.02	1.00	

データ更新日 : 2024/08/02

品番 : RAD736W

光源 : Lamp_JDR_2700K_広角 (420Lm x1)
 (RAD736W)2700K

光源光束 : 420 Lm



器具効率 : 1.00

定格光束 : 420 Lm
 (器具光束)

保守率
 良い 0.78
 普通 0.76
 劣る 0.72

[cd/光源光束1000lm]

	0°
0°	2910.84
5°	2675.74
10°	2158.18
15°	1539.46
20°	925.65
25°	470.62
30°	212.38
35°	97.94
40°	48.31
45°	26.68
50°	16.37
55°	11.33
60°	8.6
65°	6.76
70°	5.4
75°	4.1
80°	2.81
85°	1.51
90°	0.27

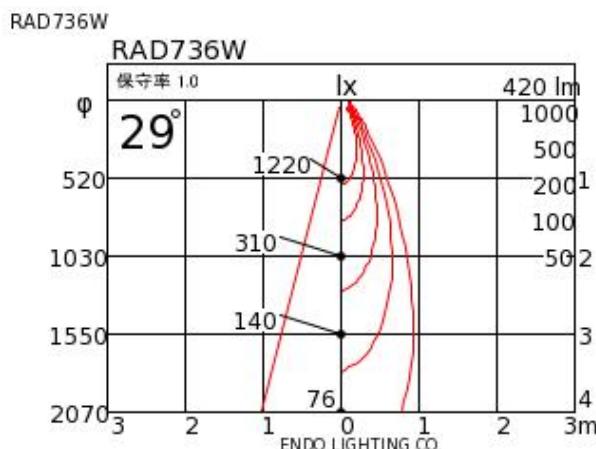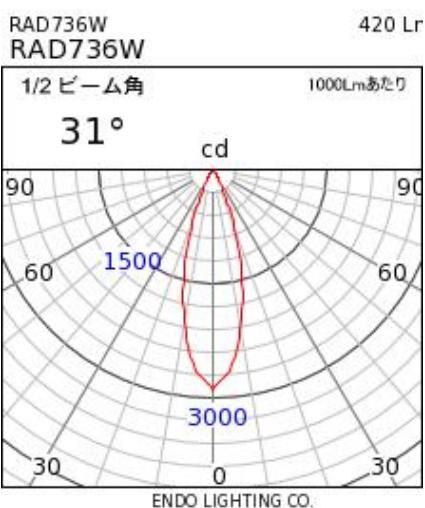

照明率表

天井	70%						50%						30%						0%	
	壁		50%		30%		10%		50%		30%		10%		50%		30%		10%	
壁	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
床	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	0%
0.6	0.83	0.79	0.77	0.75	0.74	0.73	0.81	0.78	0.77	0.75	0.74	0.73	0.80	0.78	0.76	0.75	0.73	0.73	0.72	
0.8	0.90	0.85	0.85	0.82	0.81	0.79	0.88	0.84	0.84	0.81	0.81	0.79	0.87	0.84	0.83	0.81	0.80	0.79	0.78	
1	0.95	0.89	0.90	0.86	0.86	0.84	0.93	0.88	0.89	0.85	0.85	0.83	0.91	0.87	0.87	0.85	0.84	0.83	0.82	
1.25	0.99	0.91	0.93	0.88	0.89	0.86	0.96	0.90	0.91	0.87	0.88	0.85	0.93	0.89	0.89	0.87	0.86	0.85	0.83	
1.5	1.01	0.92	0.95	0.89	0.91	0.87	0.97	0.91	0.93	0.88	0.89	0.86	0.94	0.90	0.90	0.90	0.87	0.87	0.86	
2	1.05	0.95	1.01	0.93	0.97	0.91	1.01	0.94	0.97	0.92	0.94	0.90	0.97	0.93	0.94	0.91	0.92	0.89	0.87	
2.5	1.09	0.97	1.04	0.95	1.01	0.93	1.04	0.96	1.00	0.94	0.97	0.92	0.99	0.94	0.97	0.93	0.94	0.91	0.89	
3	1.11	0.99	1.07	0.97	1.04	0.95	1.06	0.97	1.03	0.96	1.00	0.94	1.01	0.96	0.98	0.94	0.96	0.93	0.91	
4	1.16	1.03	1.14	1.01	1.11	1.00	1.10	1.01	1.08	1.00	1.06	0.99	1.05	0.99	1.03	0.98	1.02	0.98	0.95	
5	1.18	1.03	1.15	1.02	1.13	1.01	1.11	1.01	1.09	1.00	1.08	1.00	1.05	1.00	1.04	0.99	1.03	0.98	0.96	
10	1.23	1.06	1.22	1.06	1.21	1.05	1.15	1.04	1.14	1.04	1.14	1.04	1.09	1.02	1.08	1.02	1.07	1.02	0.99	

データ更新日 : 2024/08/02

品番 : RAD735N

光源 : Lamp_JDR_3000K_狭角 (460Lm x1)
 (RAD735N)3000K

光源光束 : 460 Lm



器具効率 : 1.00

定格光束 : 460 Lm
 (器具光束)

保守率 良い 0.78
 普通 0.76
 劣る 0.72

[cd/光源光束1000lm]

	0°
0°	11201.28
5°	5734.63
10°	2357.18
15°	927.2
20°	457.94
25°	241.12
30°	133.36
35°	83.5
40°	59.85
45°	46.7
50°	34.69
55°	25.69
60°	20.06
65°	16.03
70°	12.47
75°	9.32
80°	6.61
85°	3.41
90°	1.5

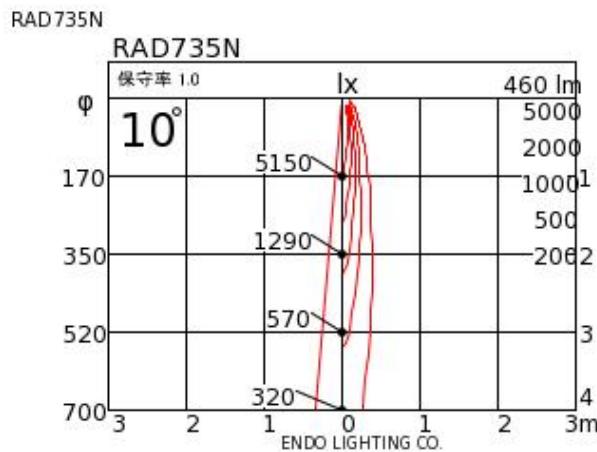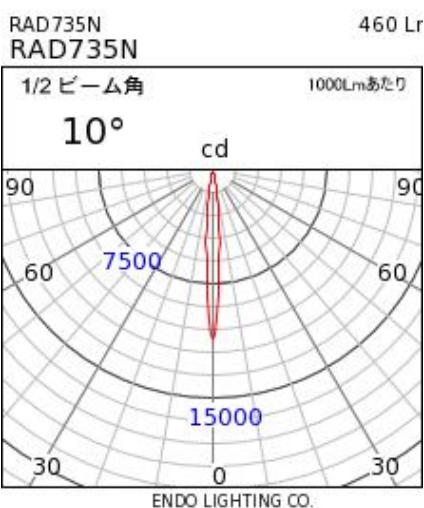

照明率表

天井	70%						50%						30%						0%	
	壁		50%		30%		10%		50%		30%		10%		50%		30%		10%	
壁	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
床	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	0%
0.6	0.85	0.81	0.80	0.78	0.77	0.75	0.84	0.81	0.79	0.78	0.76	0.75	0.83	0.80	0.79	0.77	0.76	0.75	0.74	
0.8	0.92	0.86	0.86	0.83	0.83	0.81	0.90	0.86	0.85	0.83	0.82	0.81	0.88	0.85	0.84	0.82	0.81	0.80	0.79	
1	0.96	0.90	0.91	0.87	0.87	0.84	0.94	0.89	0.89	0.86	0.86	0.84	0.91	0.88	0.88	0.85	0.85	0.84	0.82	
1.25	0.99	0.91	0.93	0.88	0.89	0.86	0.95	0.90	0.91	0.87	0.88	0.85	0.93	0.89	0.89	0.86	0.86	0.84	0.83	
1.5	1.00	0.92	0.95	0.89	0.90	0.86	0.96	0.90	0.92	0.88	0.88	0.85	0.93	0.89	0.90	0.87	0.87	0.85	0.83	
2	1.05	0.95	1.00	0.92	0.96	0.90	1.01	0.94	0.97	0.91	0.93	0.89	0.97	0.92	0.93	0.90	0.91	0.88	0.86	
2.5	1.08	0.97	1.04	0.95	1.00	0.93	1.03	0.96	1.00	0.93	0.97	0.92	0.99	0.94	0.96	0.92	0.94	0.91	0.88	
3	1.11	0.99	1.07	0.97	1.03	0.95	1.06	0.97	1.02	0.95	1.00	0.94	1.01	0.96	0.98	0.94	0.96	0.93	0.90	
4	1.17	1.03	1.14	1.02	1.12	1.01	1.11	1.02	1.09	1.00	1.07	1.00	1.05	1.00	1.04	0.99	1.02	0.98	0.96	
5	1.18	1.04	1.16	1.03	1.14	1.02	1.12	1.02	1.10	1.01	1.08	1.00	1.06	1.00	1.05	0.99	1.03	0.99	0.96	
10	1.24	1.07	1.23	1.07	1.22	1.07	1.16	1.05	1.16	1.05	1.15	1.05	1.10	1.03	1.09	1.03	1.09	1.03	1.01	

データ更新日 : 2024/08/02

品番 : RAD735M

光源 : Lamp_JDR_3000K_中角 (460Lm x1)
 (RAD735M)3000K

光源光束 : 460 Lm



器具効率 : 1.00

定格光束 : 460 Lm
 (器具光束)

保守率
 良い 0.78
 普通 0.76
 劣る 0.72

[cd/光源光束1000lm]

	0°
0°	4612.11
5°	4332.61
10°	2774.76
15°	1189.06
20°	609.81
25°	367.09
30°	192.84
35°	86.13
40°	38.2
45°	21.63
50°	14.85
55°	10.58
60°	7.84
65°	5.92
70°	4.6
75°	3.5
80°	2.44
85°	1.29
90°	0.32

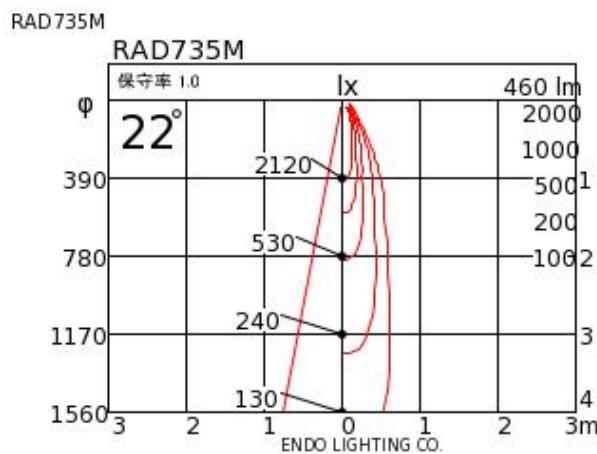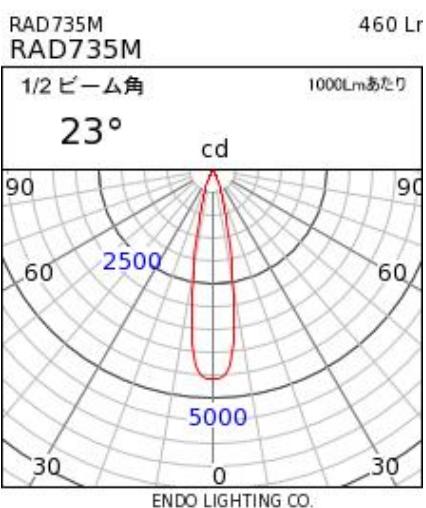

照明率表

天井	70%			50%			30%			0%		
壁	50%	30%	10%	50%	30%	10%	50%	30%	10%	30%	10%	0%
床	30%	10%	30%	10%	30%	10%	30%	10%	30%	30%	10%	0%
0.6	0.85	0.82	0.81	0.78	0.77	0.76	0.84	0.81	0.80	0.78	0.76	0.75
0.8	0.92	0.87	0.87	0.84	0.84	0.82	0.90	0.86	0.86	0.83	0.82	0.80
1	0.97	0.90	0.92	0.88	0.88	0.85	0.94	0.90	0.90	0.87	0.86	0.84
1.25	0.99	0.92	0.94	0.89	0.90	0.87	0.96	0.91	0.92	0.88	0.86	0.84
1.5	1.01	0.92	0.96	0.90	0.92	0.87	0.97	0.91	0.93	0.89	0.87	0.84
2	1.06	0.96	1.01	0.93	0.97	0.91	1.01	0.94	0.97	0.92	0.94	0.87
2.5	1.09	0.97	1.04	0.95	1.01	0.93	1.04	0.96	1.00	0.94	0.97	0.89
3	1.11	0.99	1.07	0.97	1.04	0.95	1.06	0.97	1.03	0.96	1.00	0.91
4	1.17	1.03	1.14	1.02	1.12	1.01	1.11	1.01	1.09	1.00	1.07	0.96
5	1.18	1.03	1.15	1.02	1.13	1.01	1.11	1.02	1.10	1.01	1.08	0.96
10	1.23	1.06	1.22	1.06	1.21	1.06	1.16	1.04	1.15	1.04	1.14	0.96

データ更新日 : 2024/08/02

品番 : RAD735W

 光源 : Lamp_JDR_3000K_広角 (460Lm x1)
 (RAD735W)3000K

光源光束 : 460 Lm



器具効率 : 1.00

 定格光束 : 460 Lm
 (器具光束)

 保守率 良い 0.78
 : 普通 0.76
 劣る 0.72

[cd/光源光束1000lm]

	0°
0°	2910.84
5°	2675.74
10°	2158.18
15°	1539.46
20°	925.65
25°	470.62
30°	212.38
35°	97.94
40°	48.31
45°	26.68
50°	16.37
55°	11.33
60°	8.6
65°	6.76
70°	5.4
75°	4.1
80°	2.81
85°	1.51
90°	0.27

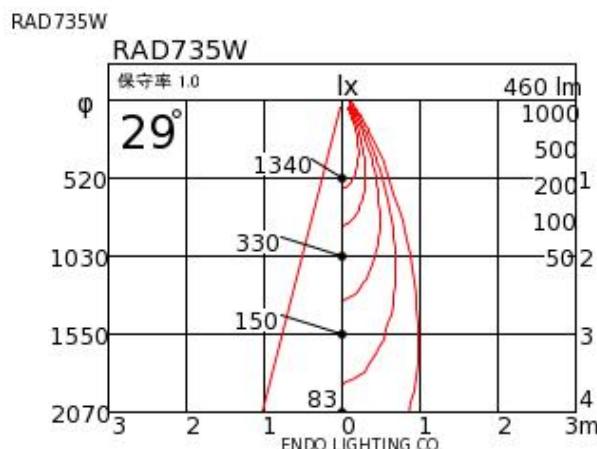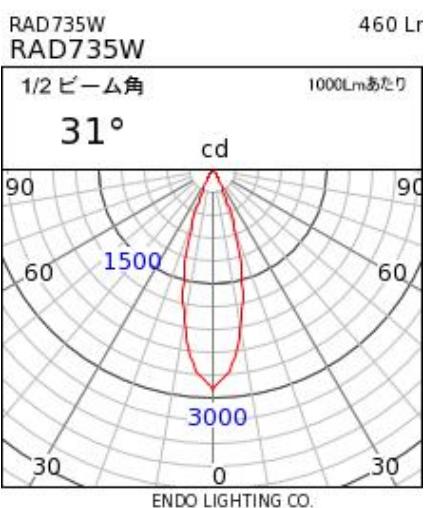

照明率表

天井	70%						50%						30%						0%	
	壁		50%		30%		10%		50%		30%		10%		50%		30%		10%	
壁	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
床	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	0%
0.6	0.83	0.79	0.77	0.75	0.74	0.73	0.81	0.78	0.77	0.75	0.74	0.73	0.80	0.78	0.76	0.75	0.73	0.73	0.72	
0.8	0.90	0.85	0.85	0.82	0.81	0.79	0.88	0.84	0.84	0.81	0.81	0.79	0.87	0.84	0.83	0.81	0.80	0.79	0.78	
1	0.95	0.89	0.90	0.86	0.86	0.84	0.93	0.88	0.89	0.85	0.85	0.83	0.91	0.87	0.87	0.85	0.84	0.83	0.82	
1.25	0.99	0.91	0.93	0.88	0.89	0.86	0.96	0.90	0.91	0.87	0.88	0.85	0.93	0.89	0.89	0.87	0.86	0.85	0.83	
1.5	1.01	0.92	0.95	0.89	0.91	0.87	0.97	0.91	0.93	0.88	0.89	0.86	0.94	0.90	0.90	0.90	0.87	0.87	0.86	
2	1.05	0.95	1.01	0.93	0.97	0.91	1.01	0.94	0.97	0.92	0.94	0.90	0.97	0.93	0.94	0.91	0.92	0.89	0.87	
2.5	1.09	0.97	1.04	0.95	1.01	0.93	1.04	0.96	1.00	0.94	0.97	0.92	0.99	0.94	0.97	0.93	0.94	0.91	0.89	
3	1.11	0.99	1.07	0.97	1.04	0.95	1.06	0.97	1.03	0.96	1.00	0.94	1.01	0.96	0.98	0.94	0.96	0.93	0.91	
4	1.16	1.03	1.14	1.01	1.11	1.00	1.10	1.01	1.08	1.00	1.06	0.99	1.05	0.99	1.03	0.98	1.02	0.98	0.95	
5	1.18	1.03	1.15	1.02	1.13	1.01	1.11	1.01	1.09	1.00	1.08	1.00	1.05	1.00	1.04	0.99	1.03	0.98	0.96	
10	1.23	1.06	1.22	1.06	1.21	1.05	1.15	1.04	1.14	1.04	1.14	1.04	1.09	1.02	1.08	1.02	1.07	1.02	0.99	

データ更新日 : 2024/08/02